

ATLANTIC 1650

New Hot & Cold laminator

THERMAL LAMINATION

- Use of thermal encapsulation films up to 320 microns

COLD LAMINATION


- Single side lamination with or without waste paper
- Simultaneous single side lamination and adhesive mounting
- Encapsulation with cold film in one run
- Application tape
- Colour background using colour vinyl
- Mounting onto boards up to 50 mm (2") thickness



- ☒ Speed up to 6,20 m/mn (21 ft/mn)
- ☒ Mounting up to 50 mm (2") thick.
- ☒ Hi-capacity hot and cold laminator up to 140°C (280°F)
- ☒ Working width 165 cm (65")



Specifications

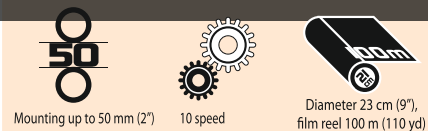

Mounting up to 50 mm (2") 10 speed Diameter 23 cm (9"), film reel 100 m (110 yd)

Atlantic 1650

Maximum thickness document + board

Maximum working width

Maximum film width

Maximum length of the film reels

Diameter of the rollers

Temperature

Heating time from 20°C to 100°C

Number of shafts delivered

Adjustable speed m/mn

Adjustable speed ft/mn

Power W

Voltage

Amperage

Dimensions of the machine (cm)
(inch)

Net weight of the machine

Shipping dimensions of the machine (cm)
(inch)

Machine weight for shipping

Warranty

Made in France, CE certified in compliance with the Machine a Electromagnetic Compatibility Directives CEM.

Roll to Roll system delivered as standard with the machine.

TOWER PRINT S.L.

C/ Poligono,6 Pol. Ind. la Lloma Aldaya 46960 Valencia

☎ 96 151 33 66 (3 lines)

☎ 96 151 44 00

✉ info@towerprint.es

🌐 www.towerprint.es



RoHS

